



PLUS SHINGLES • APP modified bitumen (TÜM approved)



>>> *Victorian® PLUS (01) Black*






PLUS SHINGLES • APP modified bitumen (TÜM approved)

Your Benefits:

- APP modified bitumen (TÜM approved)
- Superior quality high grade bitumen fibreglass shingle
- Exceeds the most stringent worldwide standards
- Additional UV protection thanks to APP Bitumen
- Higher flexibility with low(er) temperatures

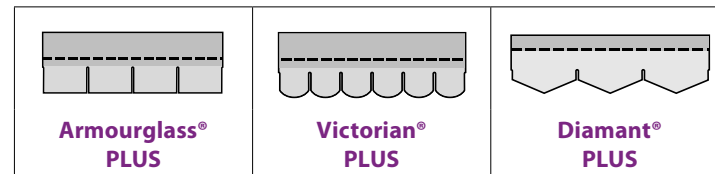

Width (EN 544)	1000 mm (± 3)	1000 mm (± 3)	1000 mm (± 3)
Height (EN 544)	336 mm (± 3)	336 mm (± 3)	284 mm (± 3)
Coverage/bundle	2 m ²	2 m ²	2 m ²
Shingles/bundle	14	14	18
Bundles/pallet	66	66	60

Granule adhesion (EN 12039)	max. 1,2 g
Tensile strength (width)* (EN 12311-1)	850 N/50 mm
Tensile strength (height)* (EN 12311-1)	500 N/50 mm
Elongation (width)* (EN 12311-1)	3,00 %
Elongation (height)* (EN 12311-1)	3,00 %
Nails shank tear resistance* (EN 12311-1)	160 N

External fire performance	B _{roof} T ₁
Reaction to fire	Class E

* Registered average values



IKO Sales International NV
 Truibroek 74 • 3945 Ham • Belgium
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30
 E residential.europe@iko.com • www.iko.be

